

25 °C Reduction in
Compaction Temperature



Desired Viscosity at
Lower Temperature



Lower Fuel, Emissions
and Odors




Easy Workability






Warm Mix Additive for Asphalt Applications

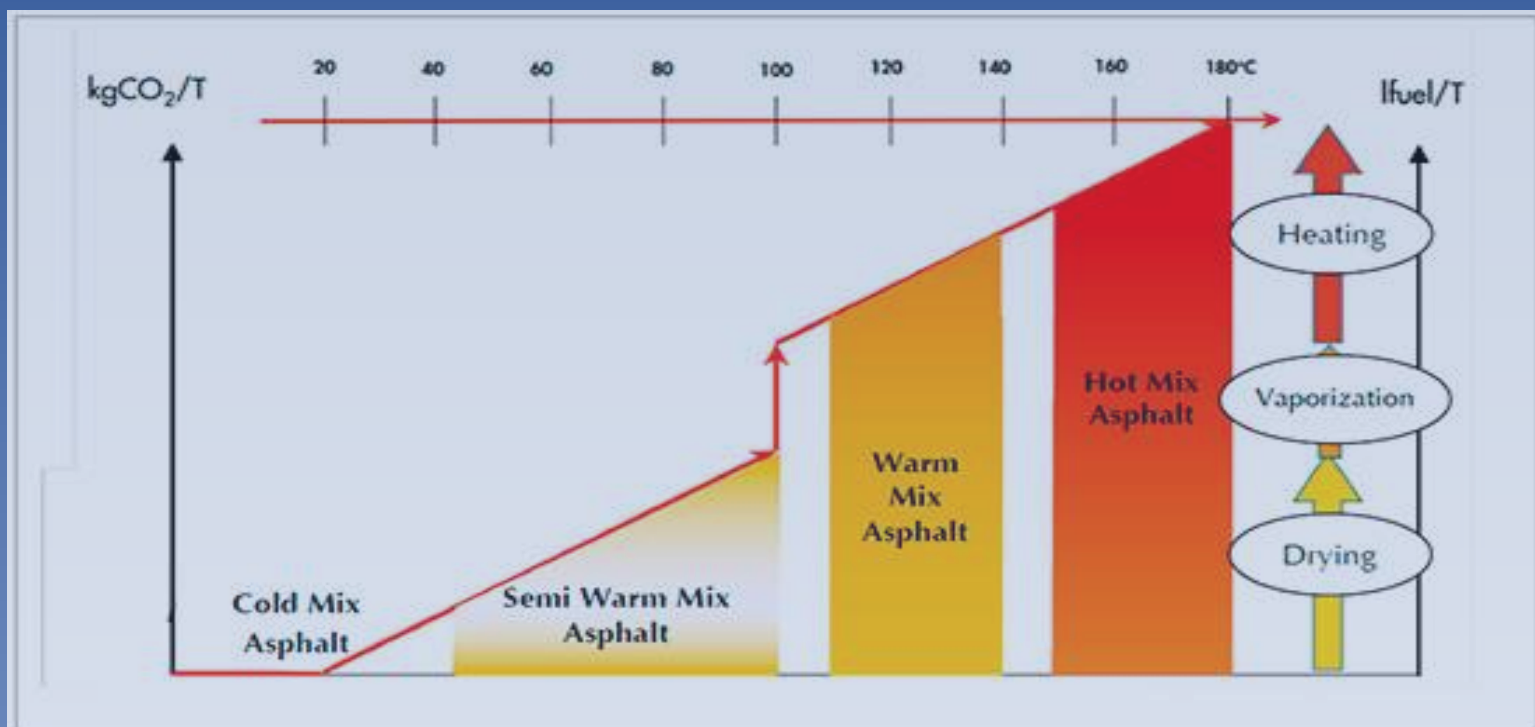

High Quality Roads Through Increased Rut Resistance



Dual Functional Biodegradable Additive

